



SUBMER SIBLE P RODUCT R ANGE

VD
RAW SEWAGE PUMP
CAST IRON



2014 PRODUCT CATALOGUE

Q/S&M/SUB MER SIBLE/C I RAW SEWAGE VD CAT/14/01



VD RAW SEWAGE PUMP

PERFORMANCE RANGE

Maximum Head:	12m
Maximum Flow:	26 m ³ /h
Power:	up to 1.8kW (2.5Hp)


OPERATING LIMITS

Maximum Immersion Depth:	5m
Maximum Liquid Temperature:	40°C
pH:	4 - 10

TECHNICAL FEATURES

The VD series sewage pump is equipped with a high-speed rotating cutter situated at the inlet of the pump, making easy work of cutting long-fibre and solid matter present in the sewage. This function prevents clogging or entanglement of the impeller by solids contained in the pumped liquid.



PUMP CURVE

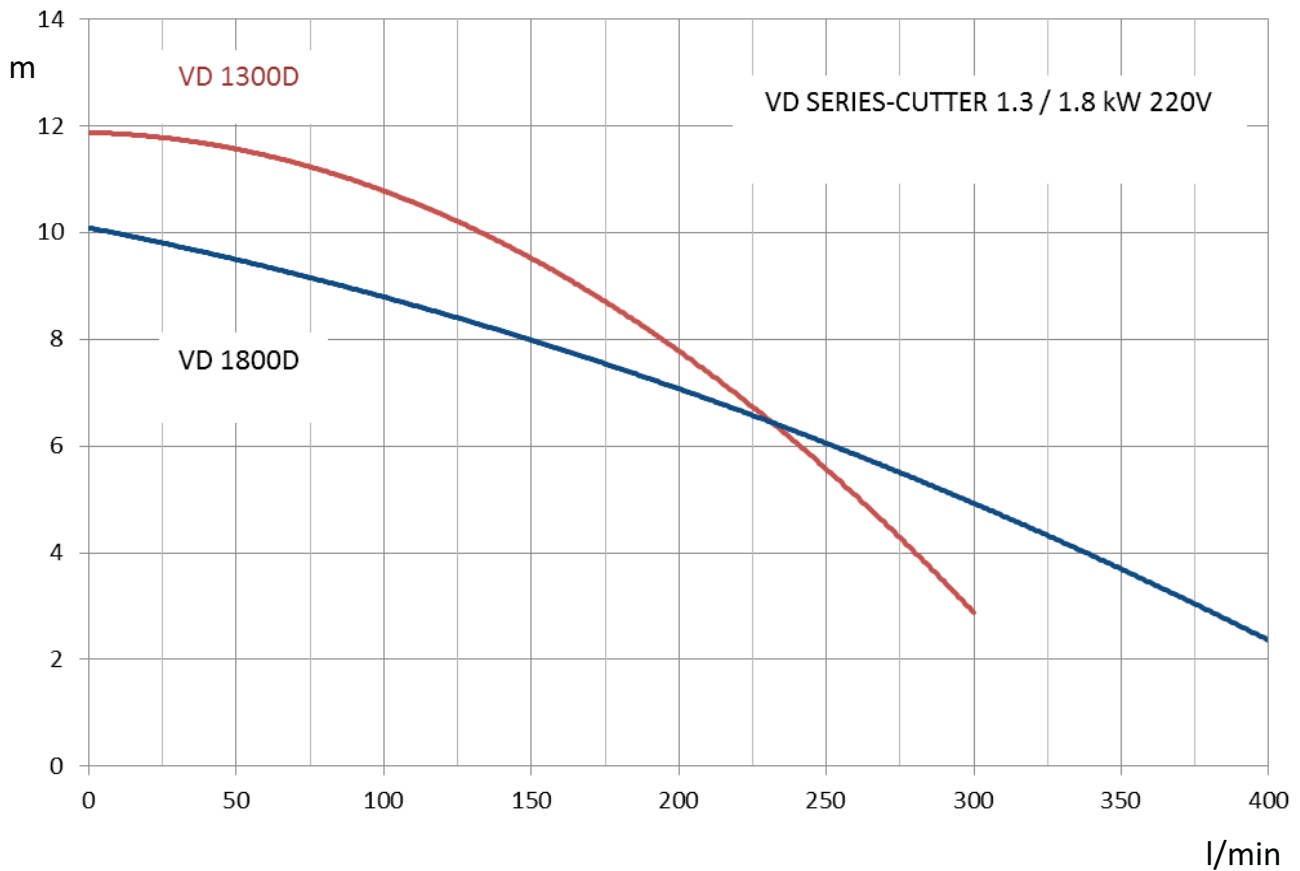

TECHNICAL DATA

MODEL	POWER	DISCHARGE(Ø)	VOLTAGE	MAX. FLOW	MAX. HEAD	WEIGHT	PACKING DIMENSIONS
	(KW)	(mm)	(V)	(l/min)	(M)	(KG)	(CM)
V1300D	1.3	50	220/380	300	12	21	57X31X25
V1800D	1.8	75	220/380	400	10	25.5	59X35X25

PUMP DIMENSIONS

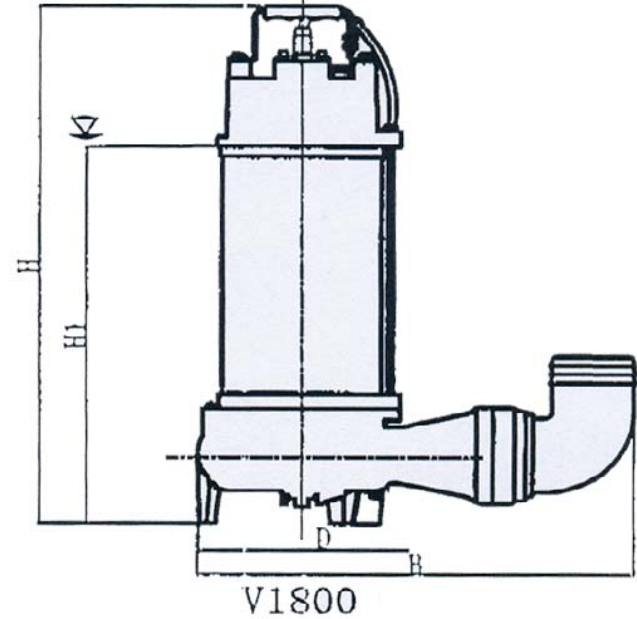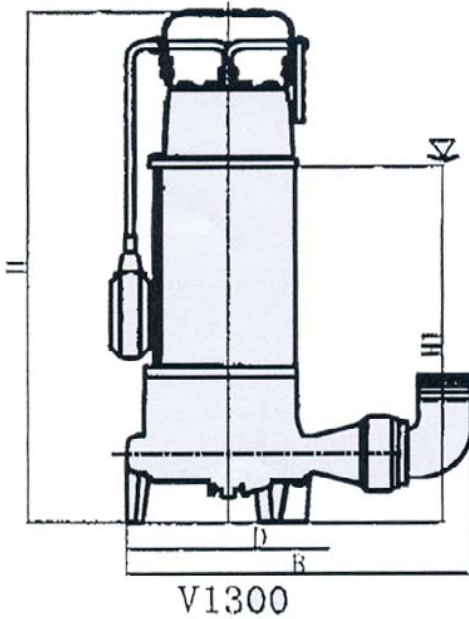

MODEL	B	D	H	H1
V1300D	325	190	516	359
V1800D	397	182	519	397